

# Overview of Complex Numbers

## 1 Initial Definitions

**Definition 1** The complex number  $z$  is defined as:  $z = a + bi$ , where  $a, b$  are real numbers and  $i = \sqrt{-1}$ .

General notes about  $z = a + bi$

- Engineers typically use  $j$  instead of  $i$ .
- Examples of complex numbers:  $5 + 2i$ ,  $3 - \sqrt{2}i$ ,  $3$ ,  $-5i$
- Powers of  $i$  are cyclic:  $i^2 = -1$ ,  $i^3 = -i$ ,  $i^4 = 1$ ,  $i^5 = i$ ,  $i^6 = -1$  and so on. Notice that the cycle is:  $i, -1, -i, 1$ , then it repeats.
- All real numbers are also complex (by taking  $b = 0$ ), so the set of real numbers is a subset of the complex numbers.

We can split up a complex number by using **the real part** and **the imaginary part** of the number  $z$ :

**Definition:** The **real part** of  $z = a + bi$  is  $a$ , or in notation we write:  $\text{Re}(z) = \text{Re}(a + bi) = a$

The **imaginary part** of  $a + bi$  is  $b$ , or in notation we write:  $\text{Im}(z) = \text{Im}(a + bi) = b$

## 2 Visualizing Complex Numbers

To visualize a complex number, we use the complex plane  $\mathbb{C}$ , where the horizontal (or  $x$ -) axis is for the real part, and the vertical axis is for the imaginary part. That is,  $a + bi$  is plotted as the point  $(a, b)$ .

In the figure to the right, we can see that it is also possible to represent the point  $a + bi$ , or  $(a, b)$  in **polar form**, by computing its modulus (or size)  $r$ , and angle (or argument)  $\theta$  as:

$$r = |z| = \sqrt{a^2 + b^2} \quad \theta = \arg(z)$$


Once we do that, we can write:

$$z = a + bi = r(\cos(\theta) + i \sin(\theta))$$

We have to be a bit careful defining  $\theta$  so that the question is well-posed.

We can define the argument  $\theta$  as the following, which looks more complicated than it actually is. Highly recommended: Draw the point  $a + ib$  in the complex plane.

$$\arg(z) = \arg(a + ib) = \theta = \begin{cases} \text{not defined} & \text{if } (a, b) = (0, 0) \\ \tan^{-1}(b/a) & \text{if } (a, b) \in \text{QI or QIV} \\ \pi/2 & \text{if } a = 0, b > 0 \\ -\pi/2 & \text{if } a = 0, b < 0 \\ \tan^{-1}(b/a) + \pi & \text{if } (a, b) \in \text{QII or QIII} \end{cases}$$

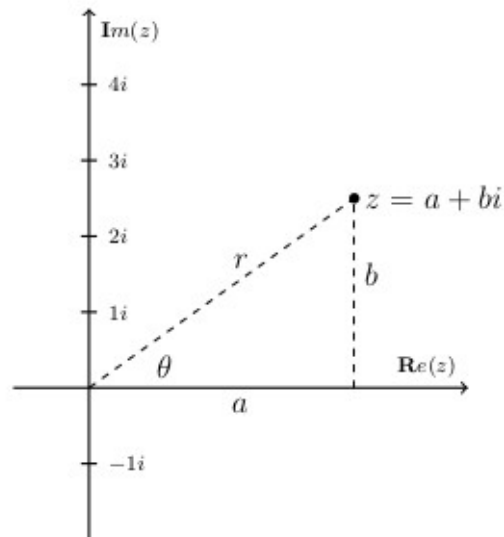

## Examples

Find the modulus  $r$  and argument  $\theta$  for the following numbers, then express  $z$  in polar form:

- $z = -3$ :

SOLUTION:  $r = 3$  and  $\theta = \pi$  so  $z = 3(\cos(\pi) + i \sin(\pi))$

- $z = 2i$ :

SOLUTION:  $r = 2$  and  $\theta = \pi/2$  so  $z = 2(\cos(\pi/2) + i \sin(\pi/2))$

- $z = -1 + i$ :

SOLUTION:  $r = \sqrt{2}$  and  $\theta = \tan^{-1}(-1) + \pi = -\frac{\pi}{4} + \pi = \frac{3\pi}{4}$  so

$$z = \sqrt{2} \left( \cos \left( \frac{3\pi}{4} \right) + i \sin \left( \frac{3\pi}{4} \right) \right)$$

- $z = -3 - 2i$  (Numerical approx from Calculator OK):

SOLUTION:  $r = \sqrt{14}$  and  $\theta = \tan^{-1}(2/3) - \pi \approx 0.588 - \pi \approx -2.55$  rad, or

$$z = \sqrt{14}(\cos(-2.55) + i \sin(-2.55)) = \sqrt{14}(\cos(2.55) - i \sin(2.55))$$

*Note to readers:* We used the “even” symmetry of the cosine and the “odd” symmetry of the sine to do the simplification:

$$\cos(-x) = \cos(x) \quad \text{and} \quad \sin(-x) = -\sin(x)$$

## 3 Operations on Complex Numbers

### 3.1 The Conjugate of a Complex Number

If  $z = a + bi$  is a complex number, then its *conjugate*, denoted by  $\bar{z}$  is  $a - bi$ . For example,

$$z = 3 + 5i \Rightarrow \bar{z} = 3 - 5i \quad z = i \Rightarrow \bar{z} = -i \quad z = 3 \Rightarrow \bar{z} = 3$$

Graphically, the conjugate of a complex number is its mirror image across the horizontal axis. If  $z$  has magnitude  $r$  and argument  $\theta$ , then  $\bar{z}$  has the same magnitude with a negative argument.

**EXAMPLE:** If  $z = 3(\cos(\pi/2) + i \sin(\pi/2))$ , find the conjugate  $\bar{z}$ :

$$\bar{z} = 3(\cos(-\pi/2) + i \sin(-\pi/2)) = 3(\cos(\pi/2) - i \sin(\pi/2))$$

### 3.2 Addition/Subtraction, Multiplication/Division

To add (or subtract) two complex numbers, add (or subtract) the real parts and the imaginary parts separately. This is like adding polynomials (with  $i$  in place of  $x$ ):

$$(a + bi) \pm (c + di) = (a + c) \pm (b + d)i$$

To multiply, expand it as if you were multiplying polynomials, with  $i$  in place of  $x$ :

$$(a + bi)(c + di) = ac + adi + bci + bdi^2 = (ac - bd) + (ad + bc)i$$

and simplify using  $i^2 = -1$ . A special product is often computed- A complex number with its conjugate:

$$z\bar{z} = (a + bi)(a - bi) = a^2 - abi + abi - b^2i^2 = a^2 + b^2 = |z|^2$$

Division by complex numbers  $\frac{z}{w}$ , is defined by making it real number division- this is done by rationalizing the denominator using the conjugate of the denominator:

$$\frac{z}{w} = \frac{z\bar{w}}{w\bar{w}} = \frac{z\bar{w}}{|w|^2}$$

**Example:**

$$\frac{1+2i}{3-5i} = \frac{(1+2i)(3+5i)}{(3-5i)(3+5i)} = \frac{(1+2i)(3+5i)}{3^2+5^2} = \frac{-7}{34} + \frac{11}{34}i$$

## 4 The Polar Form of Complex Numbers

The polar form of a complex number,

$$z = r \cos(\theta) + ir \sin(\theta)$$

has a beautiful counterpart using the complex exponential function,  $e^{i\theta}$ . First, we'll define it using Euler's formula (although it is possible to *prove* Euler's formula).

**Definition (Euler's Formula):**  $e^{i\theta} = \cos(\theta) + i \sin(\theta)$ .

We can now express the polar form of a complex number slightly differently:

$$z = re^{i\theta} \quad \text{where} \quad r = |z| = \sqrt{a^2 + b^2} \quad \theta = \arg(z)$$

An important note about this expression: The rules of exponentiation still apply in the complex case. For example,

$$e^{a+ib} = e^a e^{ib} \quad \text{and} \quad e^{i\theta} e^{i\beta} = e^{(\theta+\beta)i} \quad \text{and} \quad (e^{i\theta})^n = e^{in\theta}$$

Furthermore, in the next section, we'll look at the logarithm.

### Examples

Given the complex number in  $a + bi$  form, give the polar form, and vice-versa:

1.  $z = 2i$

SOLUTION: Since  $r = 2$  and  $\theta = \pi/2$ ,  $z = 2e^{i\pi/2}$

2.  $z = 2e^{-i\pi/3}$

SOLUTION: We recall that  $\cos(\pi/3) = 1/2$  and  $\sin(\pi/3) = \sqrt{3}/2$ , so

$$z = 2(\cos(-\pi/3) + i \sin(-\pi/3)) = 2(\cos(\pi/3) - i \sin(\pi/3)) = 1 - \sqrt{3}i$$

## 5 Exponentials and Logs

The logarithm of a complex number is easy to compute if the number is in polar form. We use the normal rule of logs:  $\ln(ab) = \ln(a) + \ln(b)$ , or in the case of polar form:

$$\ln(a + bi) = \ln(re^{i\theta}) = \ln(r) + \ln(e^{i\theta}) = \ln(r) + i\theta$$

Where we leave the last step as intuitively clear, but we don't prove it here (we have to be careful about the choice of  $\theta$  as described earlier).

The logarithm of zero is left undefined (as in the real case). However, we can now compute things like the log of a negative number!

$$\ln(-1) = \ln(1 \cdot e^{i\pi}) = i\pi \quad \text{or the log of } i: \quad \ln(i) = \ln(1) + \frac{\pi}{2}i = \frac{\pi}{2}i$$

To exponentiate a number, we convert it to multiplication (a trick we used in Calculus when dealing with things like  $x^x$ ):

$$a^b = e^{b \ln(a)}$$

### Examples of Exponentiation

$$2^i = e^{i \ln(2)} = \cos(\ln(2)) + i \sin(\ln(2)), \quad \sqrt{1+i} = (1+i)^{1/2} = \left(\sqrt{2}e^{i\pi/4}\right)^{1/2} = (2^{1/4})e^{i\pi/8}$$

## 6 Real Polynomials and Complex Numbers

If  $ax^2 + bx + c = 0$ , then the solutions come from the quadratic formula:

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

If the discriminant is negative, then the roots are complex conjugate pairs. NOTE: It is usually easier and quicker to “complete the square” than it is to use the full quadratic formula.

## 7 Exercises

- For each polynomial below, first find the roots by completing the square, then write the roots in polar form:

(a)  $x^2 - 2x + 10$

(b)  $x^2 + 4x + 5$ .

(c)  $x^2 - x + 1$

- Show that:

$$\operatorname{Re}(z) = \frac{z + \bar{z}}{2} \quad \operatorname{Im}(z) = \frac{z - \bar{z}}{2i}$$

- For the following, let  $z_1 = -3 + 2i$ ,  $z_2 = -4i$

(a) Compute  $z_1 \bar{z}_2$ ,  $z_2/z_1$

(b) Write  $z_1$  and  $z_2$  in polar form.

- In each problem, rewrite each of the following in the form  $a + bi$ :

(a)  $e^{1+2i}$

(c)  $e^{i\pi}$

(e)  $e^{2-\frac{\pi}{2}i}$

(b)  $e^{2-3i}$

(d)  $2^{1-i}$

(f)  $\pi^i$

- For fun, compute the logarithm of each number:

(a)  $\ln(-3)$

(b)  $\ln(-1 + i)$

(c)  $\ln(2e^{3i})$